
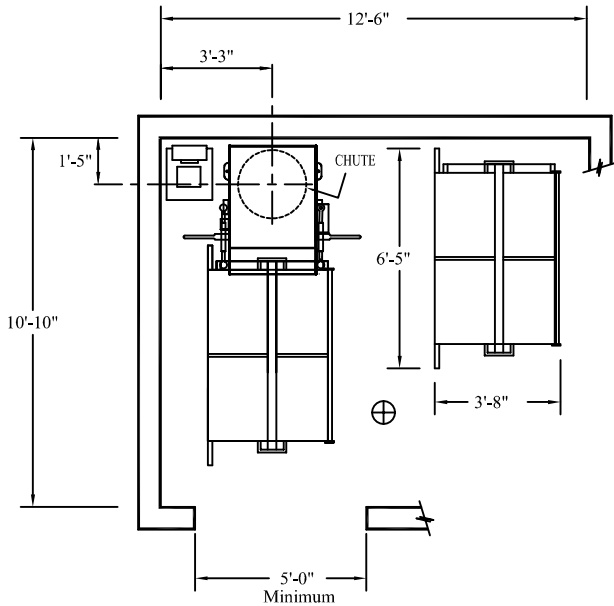


CP2-C5

DUAL, CRISS-CROSS CYLINDER DESIGN
 MAKES THIS POWERFUL COMPACTOR
 ABOUT 24" SHORTER THAN STANDARD
 MACHINES...AND IDEAL FOR
 BUILDINGS WHERE TRASH ROOM
 SPACE IS AT A PREMIUM.

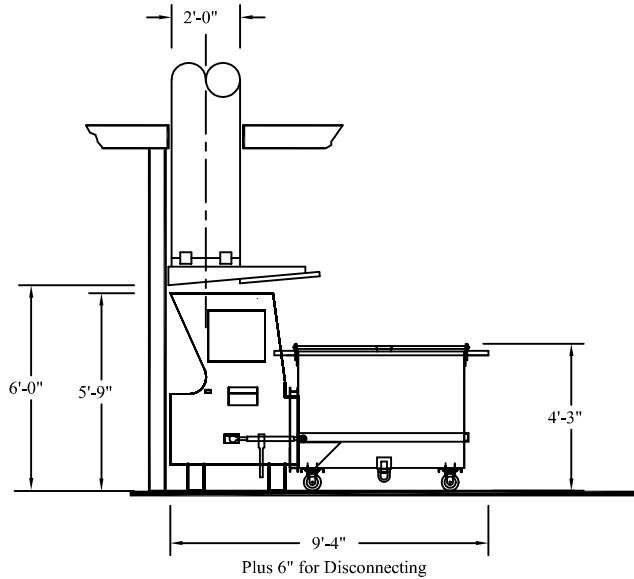

** STANDARD FEATURES **

- Powder Coat Finish*
- Photo-Electric Eye, Adjustable Timer*
- OSHA Approved Door Safety Interlock*
- Internal Transformer*
- Emergency Stop Button*
- Access Doors on Both Sides*
- Optional ON/OFF Key Switch*

525 KENNEDY ROAD
 AKRON, OHIO 44305

P: 330.733.3996
 F: 330.733.4552

CHUTE SOURCE, LLC

** GENERAL **

COMPACTOR MODEL:	CP2-C5
<i>Chamber Capacity</i>	0.29 Cu. Yd.
<i>Cycle Time</i>	28 Seconds
<i>Displacement/Hr</i>	33 Cu. Yd.
<i>(w/o Overload Protect=)</i>	54 Cu. Yd.
<i>Ram Face Pressure (N)</i>	38 psi
<i>Ram Face Pressure (M)</i>	51 psi
<i>Packing Force (N)</i>	20,160 lbs.
<i>Packing Force (M)</i>	27,540 lbs.
<i>Ram Penetration</i>	5 Inches
<i>Chamber Opening</i>	23" L x 30.5" W
<i>Ram Height</i>	18 Inches
<i>Ram Width</i>	30 Inches
<i>Overall Dimensions</i>	47" L x 39" W x 69" H
<i>Length w/ Container</i>	114 Inches
<i>Unit Weight</i>	1250 lbs

** STRUCTURAL **

<i>Floor</i>	3/8" Plate
<i>Ram Face</i>	3/8" Plate
<i>Main Frame & Hopper</i>	1/4" Plate
<i>Ram Top & Base</i>	1/4" Plate

** HYDRAULIC **

<i>Power Unit</i>	PwrPak
<i>Cylinder</i>	Dual 3" Bore, 2" Rod
<i>Pump</i>	4 gpm
<i>Oil Tank</i>	18 Gal.
<i>Normal Pressure</i>	1600 psi
<i>Relief Pressure</i>	2200 psi
<i>Rated Pressure</i>	3000 psi

** ELECTRICAL **

<i>Motor</i>	5HP, 1725 rpm
<i>Motor Power</i>	208/220/416/440V
	3Ph, 60 Hz/50 Hz
<i>Circuits</i>	115 VAC, 24 VDC
<i>Circuits Control</i>	JZ10 Microprocessor
<i>Monitors</i>	80% & 100% Full
<i>Enclosures</i>	NEMA 12
UL LISTED CONTROLS	